
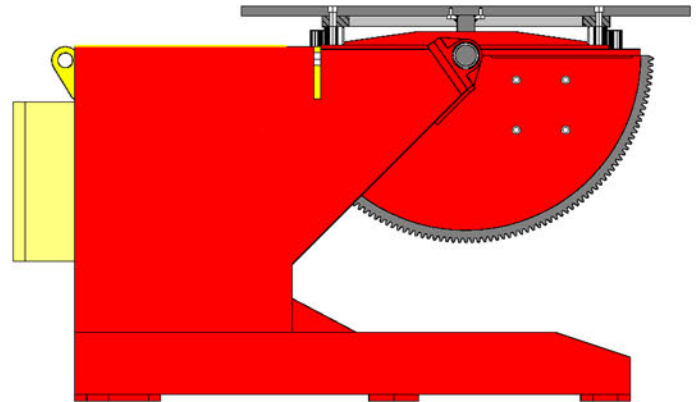


PE50-2.2-C-WE

Harbach Positioning Positioner Model PE50-2.2C-WE Series is designed to give maximum positioning flexibility by using the tilt and rotation of the table to manipulate the work piece into the correct 'down hand' position for welding or to position accurately for assembly and manufacturing requirements. The table is machined with four radial slots for anchor bolts and centric marking on the surface table, a set of tapered bearing mounted below the table to give a smooth and constant turning during operation. AC motor driven, and controlled by an AC inverter system. A variable speed controlled by a standard control pendant with low voltage push button and potentiometer with a 6-meter control cable built in. Tilt movement is electrically powered driven by 15KW AC motor with dynamic braking through reducer gearbox. Built in with 800amps rotary clamp to ensure good earthing to the welding power source.

Table diameter 2200mm or as specified by the customer.

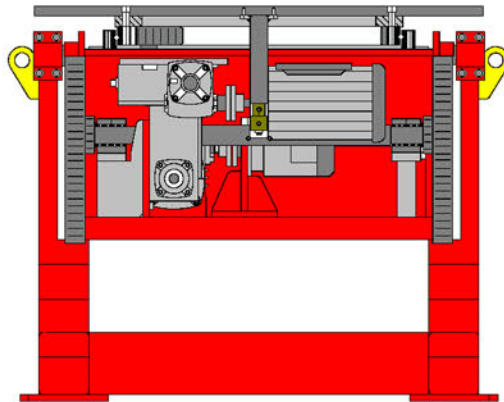

Specifications

Model: PE50-2.2C-WE

Pendant Control: 24VAC circuit, push button with 6 meter cable

Input voltage: 380-415V/3phase/50-60Hz (specify voltage requirement when ordering)

Rotation Capacity: 50 metric tons at 300mm

Rotation Speed: 0.05 to 0.5 rpm

Tilting Capacity: 50 metric tons at 300mm c of g

Tilt Range: 0 to 135 Degrees

Tilt Speed: 135 degrees in 150 seconds



Rotation Drive Motor: 1 x 15 KW motor

Rotation Drive Control: 15KW AC inverter

Tilt Drive Motor: 1 x 15KW motor c/w brake

Estimate weight: 17000kg

PE50-2.2-C-WE (50 Tonne)

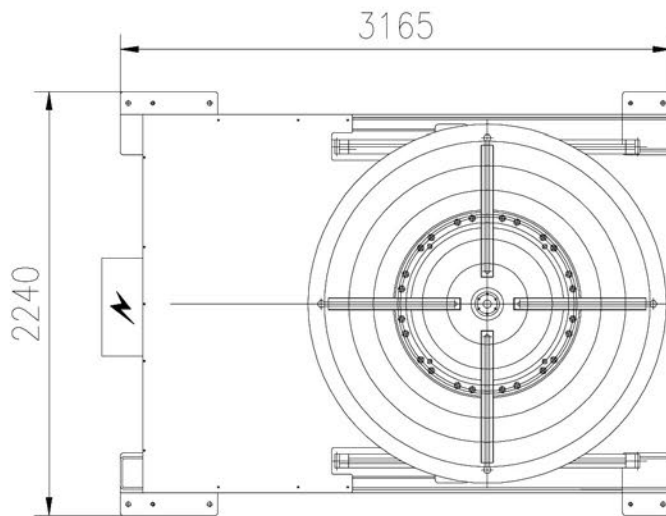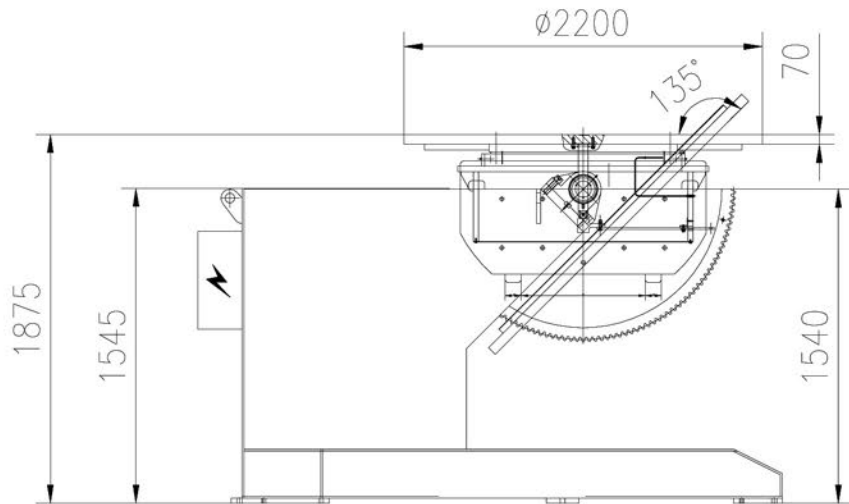


1	Model	PE50-2.2C-WE
2	Capacity (Turning)	50 MT at 300mm
3	Capacity (Tilting)	50 MT at 300mm
4	Tilt Range	0°-135°
5	Rotation Speed	0.05-0.5rpm running at 5-50Hz
6	Tilt Speed	135 in 150 sec
7	Power Supply	380/400/415V-3P-50Hz or 440/460/480V-3P-60Hz
8	Control Voltage	24VAC
9	Rotation Drive Control	15KW AC Inverter
10	Rotation Drive motor	1x15kw motor c/w Force Cooling
11	Tilt Drive Control	NA
12	Tilt Drive motor	1x15kw motor c/w with Brake
13	Control Means	NA
14	Electrical Panel	Yes
15	Earthing	800A
16	Surface Preparation	Gritblast to SA2.5
17	Painting	Lead free, 2 coats Zinc Phosphate, 1 coat Polyurethane
18	Color	RAL3003 Red & RAL9005 Black for tilting box and table
19	Qty	1 unit
20	Weight	~17000kg

Note:

1. Input terminals are wired for 400V by default.
2. This drawing is accurate at the time of preparation and may be subjected to design changes.

LOAD CHART

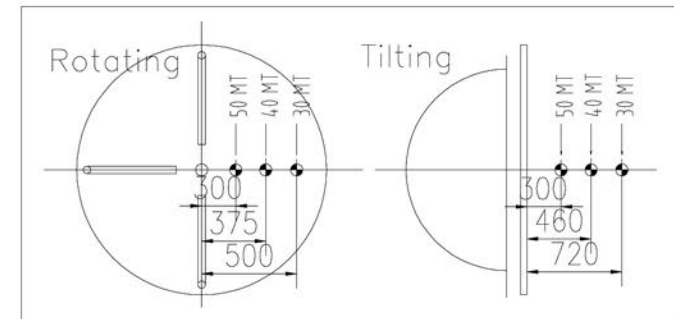

ALL DIMENSIONS IN MM, UNLESS OTHERWISE SPECIFIED.



CUSTOMER APPROVAL:

DATE:

CHECKED BY:

DATE:

DRAWN BY: IC

DATE: 28-01-2011

REV / DATE	DESCRIPTION	EDIT BY	REMARKS
CUSTOMER:			
DRAWING NAME:	POSITIONER 50MT		
DRAWING NO.:	PE50-2.2C-WE		
THE ORIGINAL AND ALL COPIES OF THIS DOCUMENT TOGETHER WITH THE COPYRIGHT THEREOF ARE THE SOLE PROPERTY OF HARBACH MARKETING, INC. DESIGN AND SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.			
SCALE:			N.T.S.
REV:			0
SHEET:			1 OF 1